



Data sheet

Tactical portable FRA1530 antenna designed for multi frequency medium range communication. For installation as flat top, inverted"V" or sloper.

Easy to install by one person. Construction for any climate use. The antenna wire consist of a multi-wired copper cable for long life operation as well as being adapted for maximum performance.

Stainless steel antenna wire on request. The total width of antenna is 30 meters. The antennas low VSWR ratio means it can be used for civilian, military or commercially available transmitters for all type of radiocommunication, including so called "frequency-jumps" operation.



The solid weather-proof construction and design makes it able to meet strict demands.

- The antenna is easy to assemble and can be done by one person.
- Balun transformer is fitted into bottom of central rod in order to completely SO239 connector.
- The end connection bars are fitted with hooks which can be used as a reel for the antenna wire under transportation.
- The antenna take little place under transportation.
- Small transport size.
- Easy to handle, which allows for install of antenna to be quickly ready for use.

The antenna`s keys performance and other parameters show that each antenna is more or less dependent on the natural earth resistance at every new point of installation including electrical and geodetic physical characters.



The antenna gives also the advantage of EMI rejecton greater than conventional dipole and other antennas on different frequencies. The antenna-system`s parameters means that VSWR and efficiency remain within approved limits. No antenna tuner required.

The SWR measurement may in reality vary in according to natural resistance, the installation or set-up of the antenna and geodetic position.

Operating range:	1,8 - 30 MHz
VSWR:	See chart (Depending upon installation)
Impedance:	50 Ohm
Power:	200W
Termination:	SO239 (Other on request)
Antenna width:	30 meters
Antenna weight:	2,8 kg
Total weight:	6,4 kg

FRA 1530

DANNEX
HF-EQUIPMENT
SWEDEN

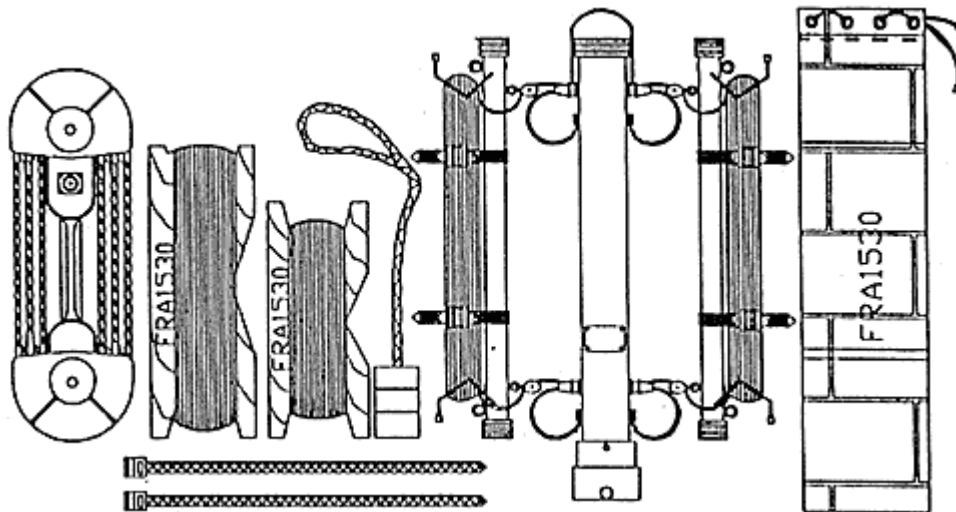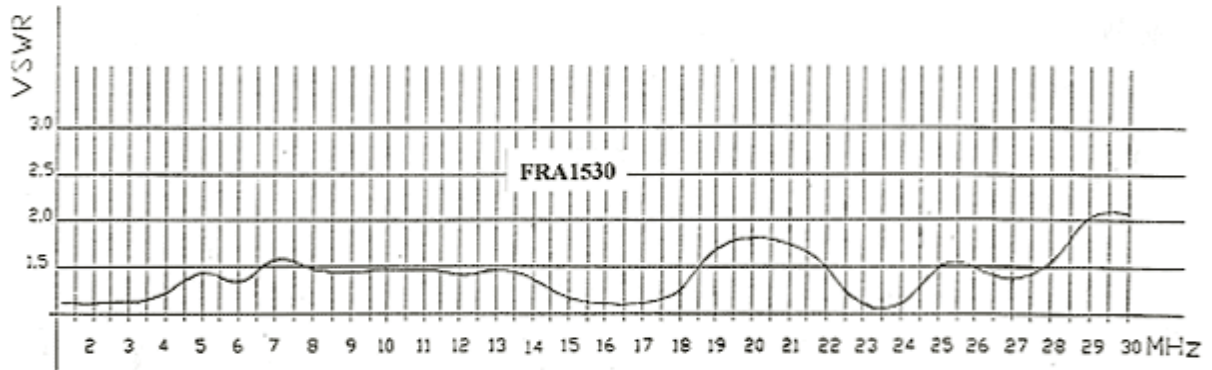

Postal Address
DANNEX HF-EQUIPMENT
Sjögården, Eggby
SE-532 92 Axvall, SWEDEN

Phone
+46 511 622 00,
+46-76-136 73 05
Fax
+46 511 622 00

E-mail
info@dannex.se